


TROLLEY SERIES



Noise reduction trolley Q series

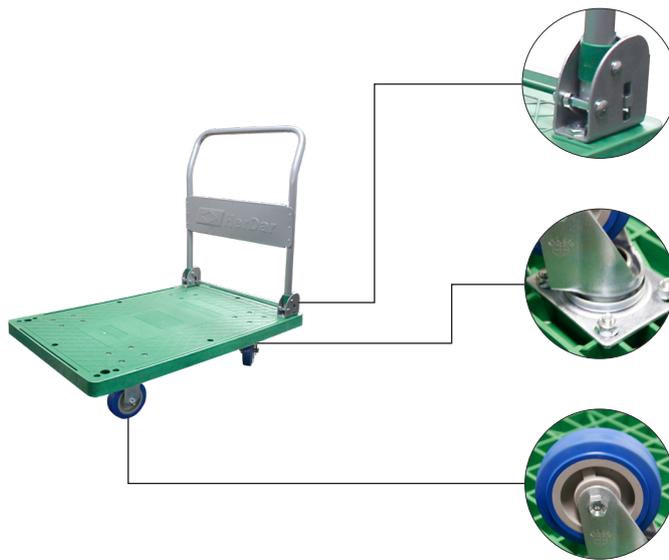

Enhanced folding mechanism design

Abandoning the traditional single-piece structure, it is not easy to deform when pushed and pulled, and the folding fixing rod is strong and durable.

Movable wheel frame bearing structure

The movable wheel frame ball disc adopts a bearing structure and a non-traditional steel ball track, making the rotation more labor-saving and quieter.

High elastic polyurethane

The wheels are made of high-elasticity polyurethane, which has excellent elasticity, saves effort and is easy to push, and protects the ground without leaving traces.

Unit: mm

Item No.	Platform Length	Platform Width	Load capacity (Kg)	Wheel Dia.	Wheel width	Wheel Height	Radius of gyration
PLT200-QW75	600	400	200	75	32	150	120
PLT250-QW100	750	450	250	120	32	175	162
PLT300-QW125	850	540	300	125	32	200	197
PLT400-QW127	920	610	400	125	38	250	228

Standard trolley TC series

Application: hotels, catering industry, logistics and transportation, various factories, office buildings

Functional features: labor-saving, silent, and heavy-duty transportation of materials

Car board material :

high performance polypropylene (PP)

Handrail material :

2.0mm high-quality powder-coated steel pipe

Caster configuration :

rigid casters X 2 + swivel casters X 2

Caster material :

TPR + electrophoretic black paint

TC-300W



TC-150



TC-300



Unit: mm

Item No.	Platform Size	Platform Height	Handle Height	Wheel Dia.	Weight(Kg)	Load capacity(Kg)
TC-300W	590 x 900	190	1070	125	24	300
TC-150	490 x 700	160	990	100	8.5	150
TC-300	590 x 900	190	1070	125	13	300

TC-150S2 Double deck cart



TC-300S2 Double deck cart



TC-150S3 Three-tiered cart



TC-300S3 Three-tiered cart



Unit: mm

Item No.	Platform Size	Platform Height	Top platform height	Layer Spacing	Handle Height	Wheel Dia.	Weight(Kg)	Load capacity(Kg)
TC-150S2	490 x 700	160	580	550	960	100	16	150
TC-300S2	590 x 900	190			990	125	23.5	300
TC-150S3	490 x 700	160	330	300	1000	100	21	150
TC-300S3	590 x 900	190			1090	125	32	300

Multifunctional trolley TC1 series

Application: hotels, catering industry, logistics and transportation, various factories, office buildings

Features: labor-saving, silent, heavy-duty, easy to carry, can be spliced and stacked

Car board material: high performance polypropylene (PP)

Caster configuration: swivel casters X 4

Caster material: polyurethane + galvanized




Unit: mm

Item No.	Platform Size	Platform Height	Wheel Dia.	Weight(Kg)	Load capacity(Kg)
TC1-150	600 x 400	125	75	3.85	150

▸ Cart splicing type



▸ Pallet truck stacking

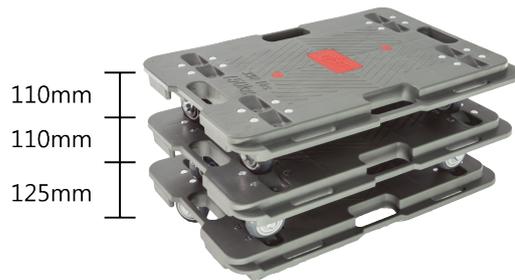

Multifunctional trolley TC1 series

Application: hotels, catering industry, logistics and transportation, various factories, office buildings

Functional features: silent, time-saving and labor-saving, innovative handle design, convenient storage

Car board material: high performance polypropylene (PP)

Handrail material: 2.0mm high-quality powder-coated steel pipe

Caster configuration: rigid casters X 2 + swivel casters X 2

Caster material: TPR + electrophoretic black paint

TC1-180



TC1-380



Unit: mm

Item No.	Platform Size	Platform Height	Handle Height	Wheel Dia.	Weight(Kg)	Load capacity(Kg)
TC1-180	480 x 720	175	820	100	10.7	180
TC1-380	600 x 900	200	910	125	15.9	380

The unique force fulcrum design breaks the phenomenon of traditional pallet trucks breaking after being stressed at the corners.


Press the red button to fold in one second



Simple collection and withdrawal



Ultra-quiet casters



Reinforced floor structure provides higher load capacity and is more durable